



A QUALITY COMMITMENT

STEELCOAT 100 SYSTEM

FOR STRUCTURAL STEEL - PIPEWORK AND FITTINGS
(OPERATING TEMPERATURES -50°C to +60°C)

**A VERSATILE TAPE COATING FOR BADLY PITTED METAL SURFACES
AND DAMP/LOW TEMPERATURE PIPEWORK**

✓ **MINIMUM SURFACE PREPARATION : HAND TOOL CLEANING** (see detailed surface preparation data sheet)

Unrivalled Surface-Tolerant Coatings for cost effective long-term protection

Additional Benefits

- Proven long-term performance
- Quick and easy to apply by hand
- Environmentally responsible
- Controlled thickness over all metal profiles
- Good adhesion & conforming properties
- Compatible with low temperature insulation cladding

Denso Steelcoat 100 System comprises an adhesive petrolatum primer (Denso Hi-Tack Primer) an optional petrolatum paste compatible with damp surfaces (SeaShield Primer P) and a very adhesive petrolatum tape (Denso Hi-Tack Tape).

For pitted or badly rusted structural steel and pipework applications Denso Hi-Tack Primer and Tape are utilised in conjunction with a petrolatum mastic for sealing voids and fittings (Denso Superlight Profiling Mastic).

For damp/low temperature pipework pipe surfaces are first primed with SeaShield Primer P. A mastic with additional insulation properties (Denso Superlight Profiling Mastic) is utilised to seal flanges and voids prior to tape wrapping. An optional




Sealing and wrapping flanges on damp pipes in a continuously humid environment.

adhesive aluminium tape (Denso Sirex Tape) provides an ideal final protective seal .



Hi-Tack Primer and Tape applied to badly pitted steelwork.

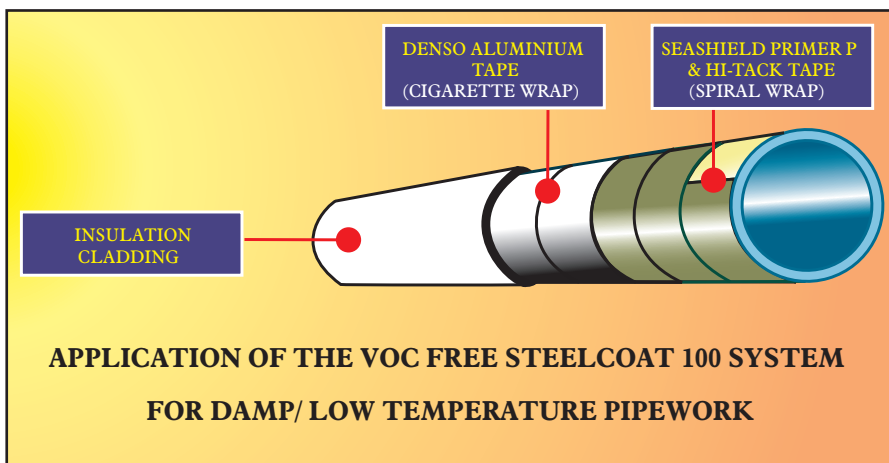

Components for badly pitted/rusted steelwork and pipework surfaces:

- Denso Hi-Tack Primer
- Denso Hi-Tack Tape
- Denso Superlight Profiling Mastic (for sealing voids and flanges etc.)

Components for damp/low temperature pipework

- SeaShield Primer P
- Denso Hi-Tack Tape
- Denso Superlight Profiling Mastic (for sealing / insulating flanges)
- Option:
- Denso Sirex Tape

Technical data sheets are provided on request for each of the above components.

STEELCOAT 200 SYSTEM

FOR METAL PIPEWORK
(MAXIMUM OPERATING TEMPERATURE 110°C)

**A VOC FREE TAPE WRAP SYSTEM FOR ABOVE GROUND PIPES
OPERATING AT HIGH TEMPERATURES**

✓ **MINIMUM SURFACE PREPARATION : HAND CLEANING ONLY** (see detailed surface preparation data sheet)

Unrivalled Surface-Tolerant Coatings for cost effective long-term protection

Additional Benefits

- No primer required
- Quick application time by hand or hand wrapping machine
- High surface tolerance
- High temperature mastic for sealing fittings and awkward shapes
- Controlled thickness
- Optional aluminium tape outerwrap provides extra mechanical and/or ultra-violet light protection



Fast Densoman Machine application of Denso Hotline Tape.

Denso Steelcoat 200 System comprises a plastic backed petrolatum tape (Denso Hotline Tape) and a high temperature mastic for sealing fittings and awkward shapes (Densoseal 16A). No primer is required.

An adhesive aluminium tape (Denso Sirex Tape) is an optional outerwrap which provides extra mechanical and/or ultra-violet light protection.

Steelcoat 200 System Components:

Denso Hotline Tape

(applied with a 55% overlap by either hand or machine application)

Options:

Densoseal 16A (mastic for sealing fittings)

Denso Sirex Tape

Technical data sheets are provided on request for each of the above components.

All statements/data presented herein are given in good faith and believed to be appropriate and reliable. However, it is given without express or implied warranty or guarantee. Potential users of our materials are urged to conduct confirmatory trials to satisfy themselves as to the suitability of the selected product for their particular end use, prior to purchase.



Approved Quality Management System
AS/NZS ISO 9001:2000
Lloyds Register - Certificate No. MEL 0927759



Denso (Australia) Pty Ltd



411-413 Victoria Street, Brunswick Vic 3056, Australia

MELBOURNE ● SYDNEY ● ADELAIDE ● BRISBANE ● PERTH

Tel: +61 3 93567600 or 1300 658 590 (toll free) ● Email: denso@densoaustralia.com.au ● Web: www.densoaustralia.com.au

Denso (New Zealand) Ltd Tel: +64 21 304 660 ● Email: info@denso.co.nz