
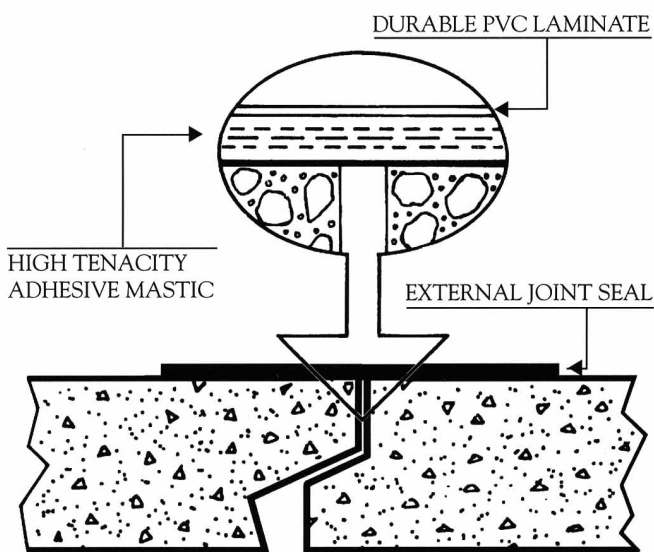
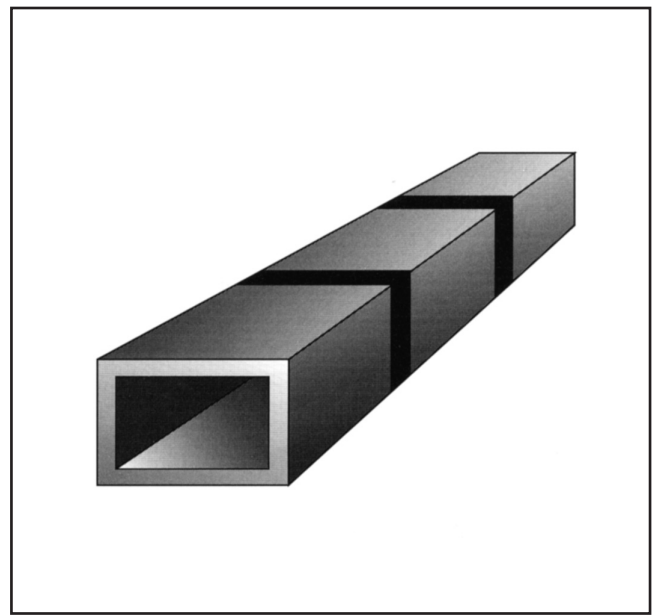


EXTERNAL JOINT SEAL

PREVENTS BACKFILL INFILTRATION:

FOR: ● CONCRETE PIPES ● CULVERTS ● CROWN UNITS

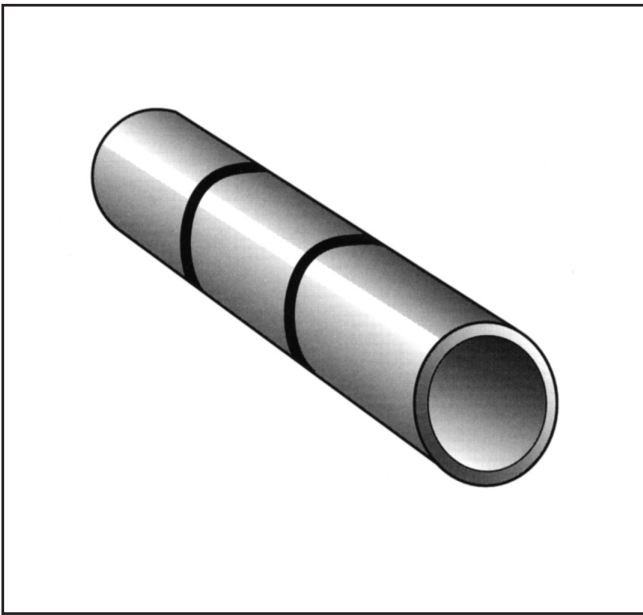

Sectional view of standard flush joint pipe

Features, Advantages and Benefits:

- Highly conformable sealing membrane prevents backfill infiltration.
- Simple installation procedure.
- Suits all component size types.
- Supersedes the requirement for outmoded mortar or banded joints.

DENSO ULTRAFLEX 1500 TAPE

EXTERNAL JOINT SEAL

PREVENTS BACKFILL INFILTRATION:
FOR: ● CONCRETE PIPES ● CULVERTS ● CROWN UNITS

- Cold applied
- Tenacious adhesion
- Extremely economical
- Accommodates joint deflection
- Prevents backfill infiltration

TECHNICAL DATA

Specification:

External joint seal comprises a non-rotting synthetic carrier impregnated with an adhesive mastic and backed one side with a durable PVC laminate. The adhesive mastic is protected with a siliconised release film which is removed during application.

Installation Procedure

1. Select the correct width. Allow not less than 45mm overlap each side of joint.
2. Surface to be clean and dry.
3. Peel back about 0.5 mtr. of interleaving.
4. Apply adhesive mastic face of tape to joint.
5. Pull tape taut to eliminate wrinkles and press into place.

Packaging:

100mm width - 12 x 10m roll/ctn
150mm width - 8 roll/ctn
225mm width - 4 roll/ctn

Property	Value
Thickness:	1.5mm average
Reinforcement:	Plastic carrier
Laminate:	PVC
Elongation at break:	30%
Tensile strength:	250N/25mm width
Mass:	1.5Kg / M ² average
Impact energy:	3.5 Joule (round tup)
Temperature range:	Application 15°C to 50°C
Length:	10 mtr roll
Width:	100mm, 150mm, 225mm

All statements/data presented herein are given in good faith and believed to be appropriate and reliable. However, it is given without express or implied warranty or guarantee. Potential users of our materials are urged to conduct confirmatory trials to satisfy themselves as to the suitability of the selected product for their particular end use, prior to purchase.



Approved Quality Management System
AS/NZS ISO 9001:2000
Lloyds Register - Certificate No. MEL 0927759



Denso (Australia) Pty Ltd



411-413 Victoria Street, Brunswick Vic 3056, Australia

MELBOURNE ● SYDNEY ● ADELAIDE ● BRISBANE ● PERTH

Tel: +61 3 93567600 or 1300 658 590 (toll free) ● Email: denso@densoaustralia.com.au ● Web: www.densoaustralia.com.au

Denso (New Zealand) Ltd Tel: +64 21 304 660 ● Email: info@denso.co.nz