

STEELCOAT 100™ SYSTEM



A petrolatum tape system for the protection of above ground pipe and steelwork

The Steelcoat 100™ System comprises of an adhesive petrolatum primer (Denso™ Hi-Tack Primer), an optional petrolatum paste compatible with damp surfaces (Denso SeaShield Primer) and a very adhesive petrolatum tape (Denso Hi-Tack™ Tape). For pitted or badly rusted structural steel and pipework applications, a petrolatum mastic is used to seal voids and fittings (Denso Profiling Mastic™).

A polyurethane membrane (Denso™ Single-Pack Elastomeric Membrane) cures to form a tough, flexible membrane and seals the system.

FEATURES

- Cold-applied
- Surface tolerant
- Useful for damp/low temperature surfaces
- Useful for pitted or badly rusted surfaces
- Minimum surface preparation needed - hand tool cleaning only
- Can be applied by hand or wrapping machine

COMPONENTS

For badly pitted/rusted structural steel and pipework:

Denso Hi-Tack™ Primer

Denso Hi-Tack™ Tape

Denso Profiling Mastic™

For sealing voids and fittings.

For damp/low temperature pipework:


Denso SeaShield Primer

Denso Hi-Tack™ Tape

Denso Single-Pack Elastomeric Membrane

SURFACE PREPARATION

Minimal surface preparation required. Surfaces must be clean and dry. Remove all loose rust, scale and flaking coatings by hand wire brush.

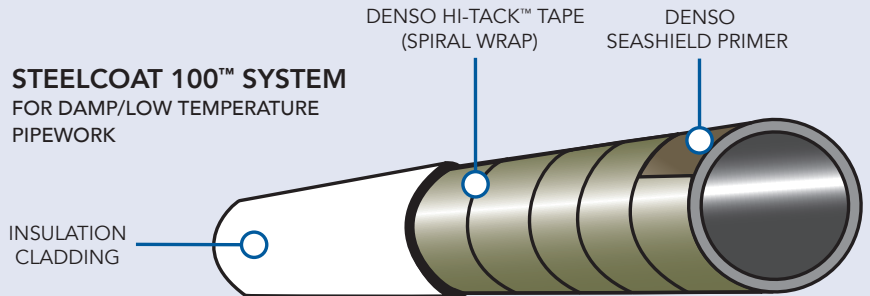

Ver 0704.22

DENSO (AUSTRALIA) PTY LTD

TEL: +61 (03) 9356 7600

FAX: +61 (03) 9356 7699

EMAIL: denso@densoaustralia.com.au

WEB: www.densoaustralia.com.au

77-95 National Boulevard

Campbellfield,

Victoria 3061

AUSTRALIA



ISO 9001:2015

